


SN# 001715 Lamp Specific Acceptance Test




Model: UV-2400, Nomad	Result	Steady State	Acceptable	Units
Peak Output Wavelength	Pass	369 $\pm$	365 ± 5	nm
Full Width Half Maximum (FWHM)	Pass	11 $\pm$	≤ 15	nm
Full Width at 10% Maximum	Pass	24 $\pm$	≤ 30	nm
Longest Wavelength at Half Maximum	Pass	375 $\pm$	≤ 377	nm
Max Excitation Irradiance (347-382 nm)	Pass	3356 $\pm$	≥ 2000	$\mu\text{W}/\text{cm}^2$

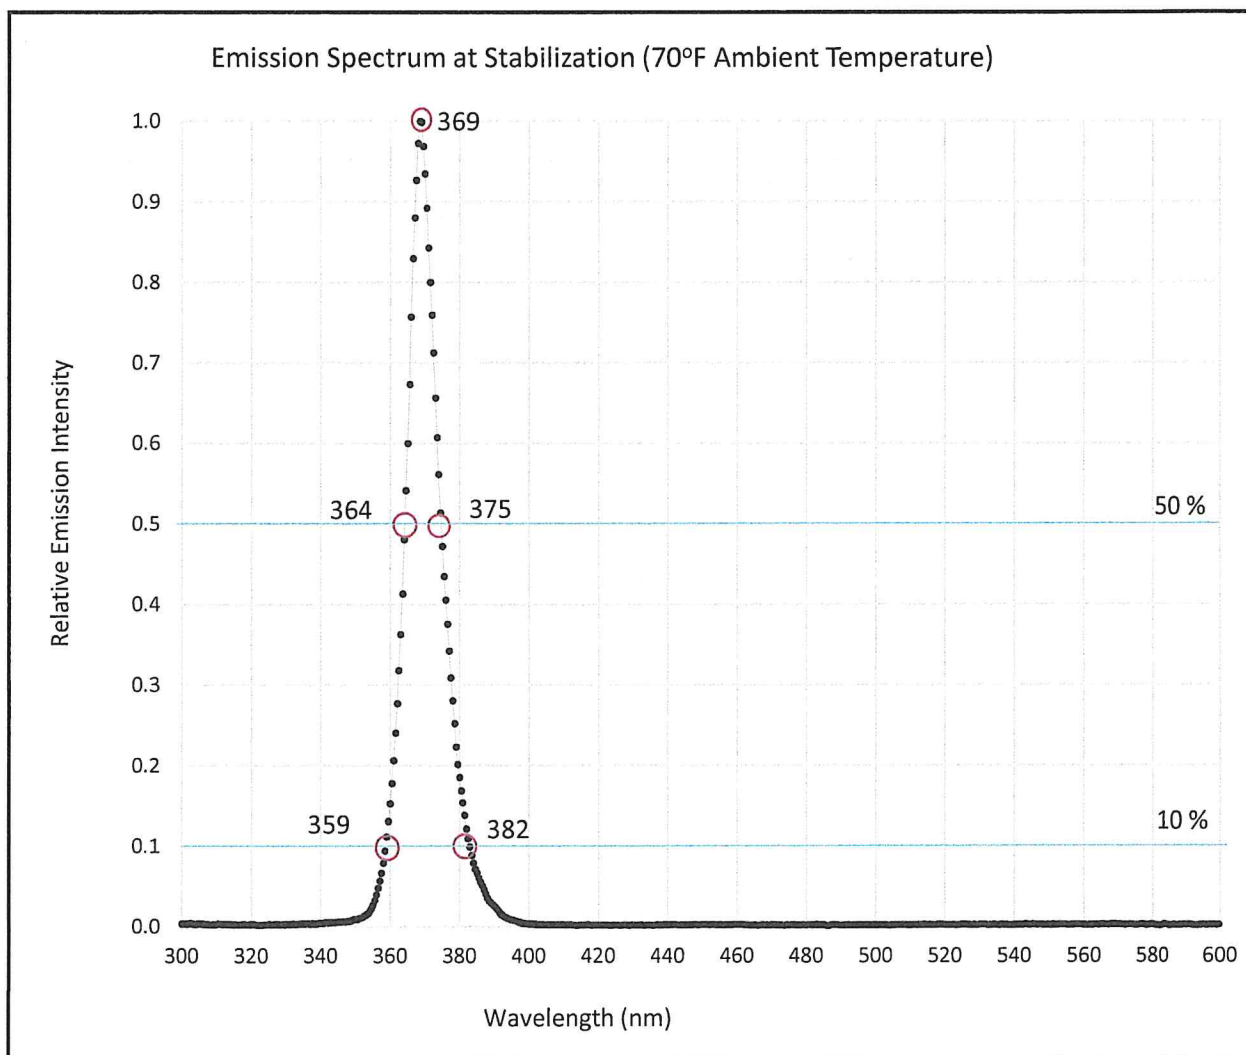

Inspector: MK
 Date of Certification: 8-13-2026

This lamp has been tested to conform to all requirements of:
 ASTM E3022 ☒ AITM6-1001 ☒ ISO 3059 ☒ RRES 90061 ☒

Emission Spectrum Measured at Stabilization Temperature with Blue-wave UV-25 S/N 26011309, Certificate Number 26011309-UV-CR2-0126





C4 Nomad Series, Certificate of Conformance

SN# 001715	Switch On	Steady State	Elevated Temp*	Acceptable	Units
Peak Output Wavelength	368	369	369	365 ± 5	nm
Full Width Half Maximum (FWHM)	11	11	13	≤ 15	nm
Full Width at 10% Maximum	24	24	26	≤ 30	nm
Longest Wavelength at Half Maximum	374	375	377	≤ 377	nm
Visible Emission at 15 in	15	13	9	≤ 20	Lux
Visible Emission at 36 in	3	3	3	≤ 5	Lux
Irradiated Area at 15 in ($>1000 \mu\text{W}/\text{cm}^2$)	11	10	9	≥ 5	Inch Diameter
Max Excitation Irradiance (347-382 nm)	3,524	3,356	2,400	≥ 2000	$\mu\text{W}/\text{cm}^2$
Irradiance at Peak Output Wavelength	294	280	185	-	$\mu\text{W}/\text{cm}^2$
Min Working Distance** ($< 5000 \mu\text{W}/\text{cm}^2$)	13	11	10	-	Inches
Max Working Distance** ($> 1200 \mu\text{W}/\text{cm}^2$)	25	21	19	-	Inches
Body Stabilization Temp (70°F Ambient)	-	116	-	≤ 120	°F
Current Ripple	9	9	9	≤ 35	mA peak-peak
Typical Battery Discharge Time (36Wh Batt)	-	150	-		Minutes

* Tested in a 110° F Environment, the maximum ambient temperature where light still meets all requirements

** C4 Nomad series lights use a single LED emitter, thus beam uniformity does not change with working distance (RRES 90061)

